

**Features**

- Multifunction showerhead and handshower each have advanced spray engines to provide three experiences: full coverage, pulsating massage, and silk spray
- Full coverage spray produces an encompassing spray ideal for everyday use
- Pulsating massage spray targets sore muscles to ease away aches and pains
- Silk spray releases a dense, luxurious spray ideal for rinsing
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate at 45 psi (3.1 bar)
- Box includes: Showerhead, handshower, 60" (1524 mm) metal hose

**Material**

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

**Installation**

- Shower arm and flange sold separately

**Recommended Products/Accessories**

- K-933 Shower Arm and Flange
- K-7395 Shower Arm and Flange
- K-7397 Shower Arm and Flange
- K-20005 Shower Arm and Flange
- K-26318 Shower arm and flange

**Codes/Standards**

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992

**KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.


**Available Colors/Finishes**

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium
	BGP	Vibrant Brushed Graphite

**KOHLER**® Faucets

**Purist®**  
2-in-1 multifunction 2.5 gpm shower combo kit  
**K-23219**

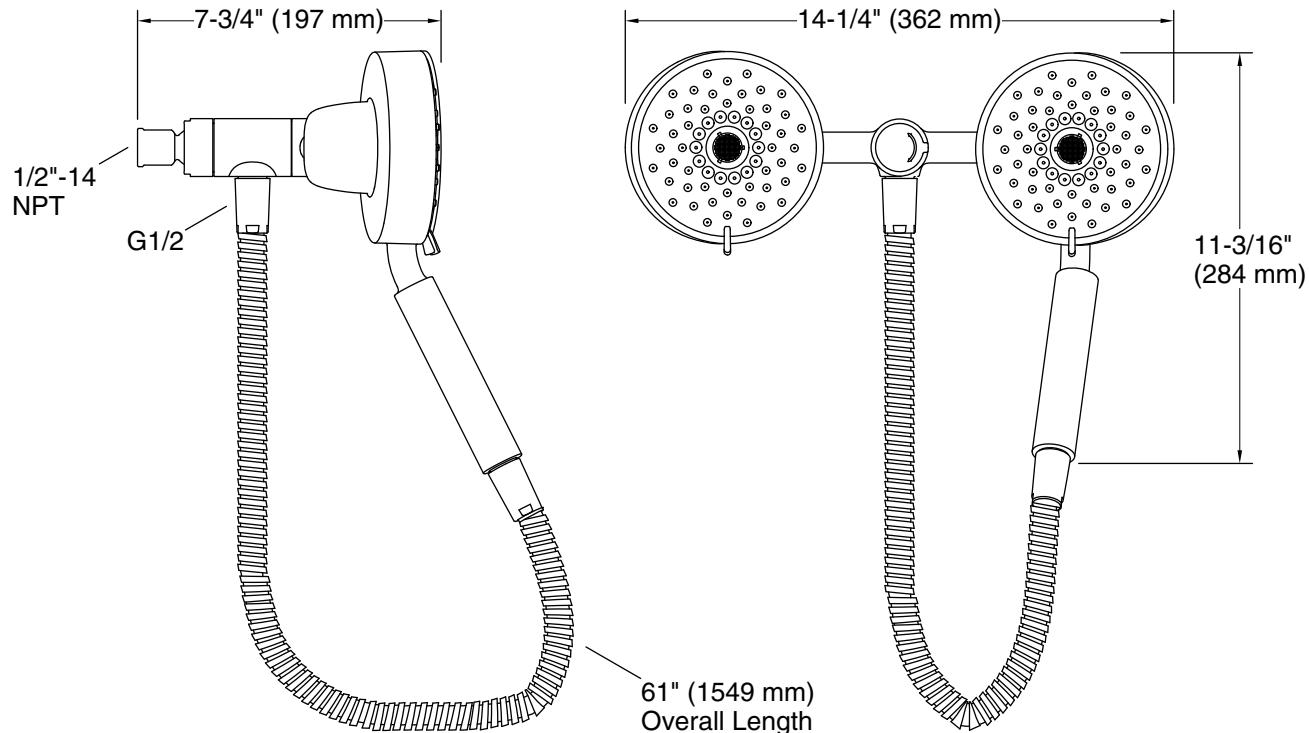

#### Technical Information

All product dimensions are nominal.

#### Spout:

Handshower rated max flow: 2.5 gal/min (9.5 l/min)

Shower/Rainhead rated max flow: 2.5 gal/min (9.5 l/min)

#### Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 0 gal/min (0 l/min) or higher.