KALLISTA

One™ by KALLISTA
Sink Faucet, Low Spout, Lever Handles
P24491-LV

Features
- A selection of products within this collection is in stock and ready to ship. Please visit kallista.com/readytoship for the complete list of Ready-to-Ship products and finishes
- High-quality solid-brass construction for durability and reliability
- Widespread sink faucet for 8" – 16" (203 – 406 mm) centers
- 1.2 gpm (4.5 lpm) maximum flow rate
- Spout reach is 5-5/16" (135 mm)
- Includes soft-touch drain
- Laminar flow
- Lift rod option available for projects

Recommended Products/Accessories
P74234-WO Under-mount Sink, Soft Rectangle with Overflow, Glazed
P24490-CR Sink Faucet, Gooseneck Spout, Cross Handles
P34410-00 Towel Ring
P34407-00 Disc Hook



WaterSense Meets EPA Criteria Certified by IAPMO R&T

ADA | **CSA B651** | **OBC**

Codes/Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372

KALLISTA® Five-Year Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	GN	Gunmetal
	BL	Matte Black
	ULB	Unlacquered Brass
	BAF	Brushed French Gold
	BGP	Brushed Graphite
	BN	Brushed Nickel
	PGP	Polished Graphite
	SN	Polished Nickel
	2MB	Brushed Moderne Brass

KALLISTA

One™ by KALLISTA

Sink Faucet, Low Spout, Lever Handles

P24491-LV

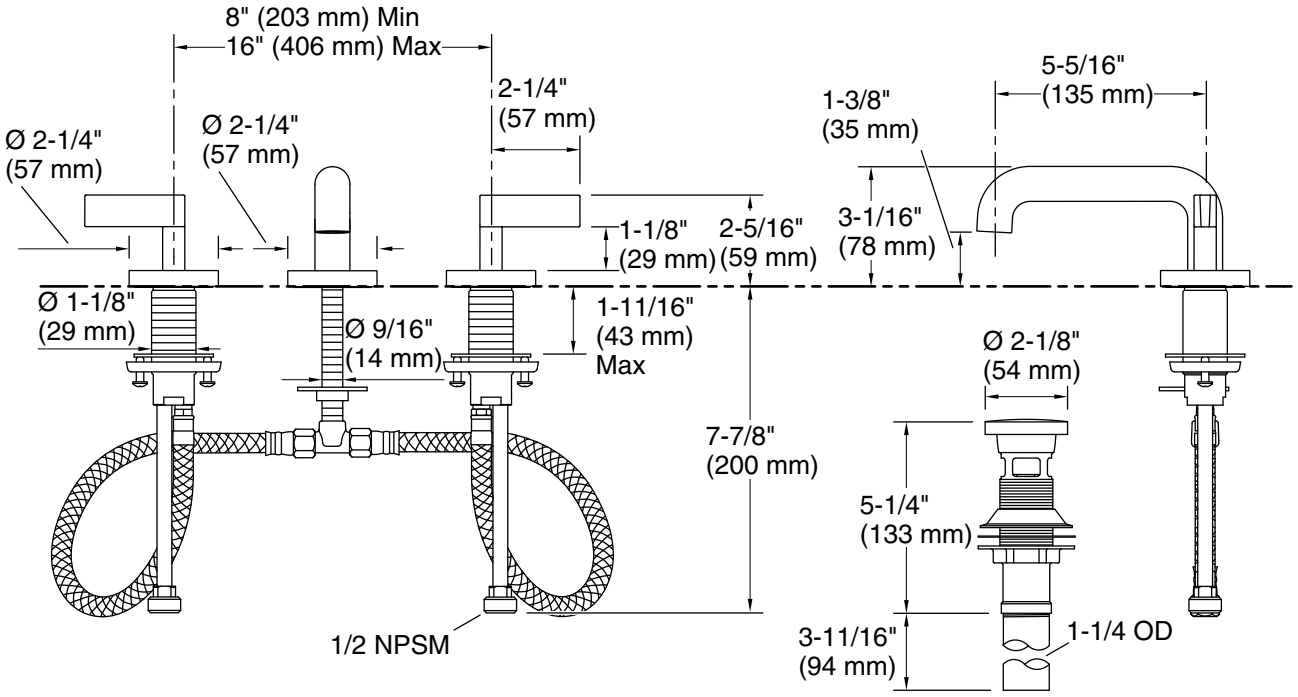

Technical Information

All product dimensions are nominal.

Faucet flow rate:	1.2 gal/min (4.5 l/min)
Drain included:	Yes
Drain with overflow:	Yes

Spout:

Spout reach:	5-5/16" (135 mm)

Pressure/fixture Supply Requirements

Min flow rate:	1.8 gpm (6.8 lpm)

Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.